

SPDCPOE12

Power over ethernet 10 W module

Preliminary data

Features

- Input voltage range: 38.5 V to 60 V
- 10 W output
- Based on ST devices integrating standard PoE interface and current mode PVM controller
- IEEE 802.3af compliant (PoE standard)
- Class 0 (zero), 0-12.96 W input
- Output voltage 12 V
- Output current 0.8 A
- Output voltage ± 5 %
- Ripple 1 % rms
- Transient response ±5 %, ½ load to full load
- Operating temperature range -40 °C to 70 °C
- Input transient suppressor
- Under voltage lockout
- Soft-start
- Short circuit protection
- 1500 VDC input/output insulation
- Input and output will be remally maintained within SELV limit
- Very compact size, about 86x24.2x17 mm
- Vertical Tr:1 package
- RoHS perinpliant
- UL 94V-0 flammability



Applications

- The ranget applications are small low power complete IP appliances.
- Security system, doors access, cameras, alarms
- Displays
- Public address systems
- Wireless access point
- Environmental control
- Telemetry
- Remote environmental monitoring

Table 1. Device summary

Order code	Nominal input voltage	Nominal output voltage	Max efficiency	Nominal power
SPDCPOE12	48 V	12 V	TBD %	10 W

Description SPDCPOE12

1 Description


SPDCPOE12 is a power module specifically designed to provide an isolated, low-voltage power source to a remote powered device (PD) in power over ethernet (PoE) applications. SPDCPOE12 has full functional compliance with IEEE802.3af. It is designed to extract power from Ethernet cable when sourced by power sourcing equipment (PSE) also conforming to IEEE802.3af. SPDCPOE12 is rated 10 W and incorporate PD detection and PD classification current signatures required for the PSE. The module is compatible with PD classifications class 0. In addition to a fully integrated DC-DC converter, each SPDCPOE12 power module incorporates internal input diode bridges to support both data line and spare line pair standard ethernet connections, a transient suppressor for input over-voltage protection, and an EMI filter to ensure noise compatibility with Ethernet data signals. Other features include: input under voltage lockout (UVLO), soft-start, over-current and short-circuit protection.

Table 2. Pin description

	Table 2.	i ili description		
	No	Pin name	I/O	L e. cr iption
	J1-1	TX +	I	Ethernet in data line
	J1-2	TX -	I	Ethernet in data line
	J1-3	RX +	I	Ethernet in data line
	J1-4	SP1	÷ O	Ethernet in spare line
	J1-5	SP1		Ethernet in spare line
	J1-6	RX -	I	Ethernet in data line
	J1-7	SP2	Ι	Ethernet in spare line
	J1-8	243	I	Ethernet in spare line
	J2-1	TD+	0	Ethernet out data line
	J2 ⁴	TD -	0	Ethernet out data line
	J2-3	RD+	0	Ethernet out data line
7/6	J2-4		n.c.	
1050/8	J2-5		n.c.	
U/O2	J2-6	RD-	0	Ethernet out data line
	J2-7		n.c.	
	J2-8		n.c.	
	J3-1	Vout +	0	Power output +12 Volt
	J3-2	Vout +	0	Power output +12 Volt
	J3-3	Vout -	0	Power output 0 Volt
	J3-4	Vout -	0	Power output 0 Volt

Rev 1

2 Typical configuration

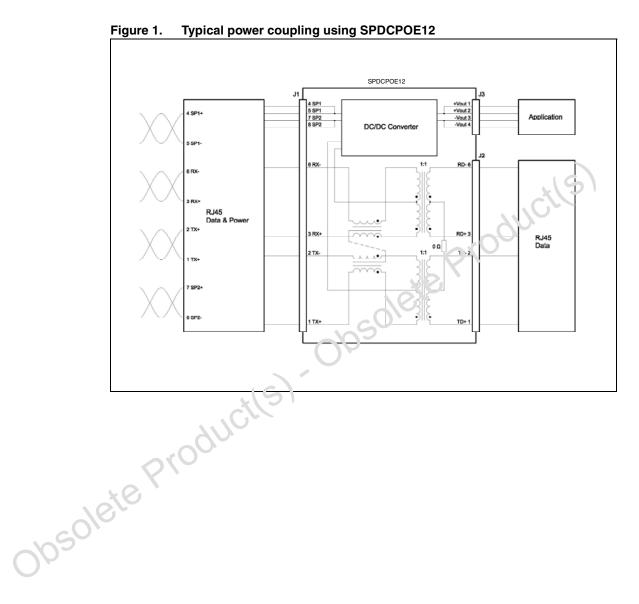

Mechanical data SPDCPOE12

3 Mechanical data

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK[®] packages, depending on their level of environmental compliance. ECOPACK[®] specifications, grade definitions and product status are available at: www.st.com. ECOPACK is an ST trademark.

Figure 2. Mechanical dimensions


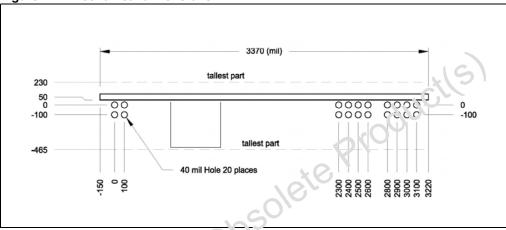


Figure 3. Footprint

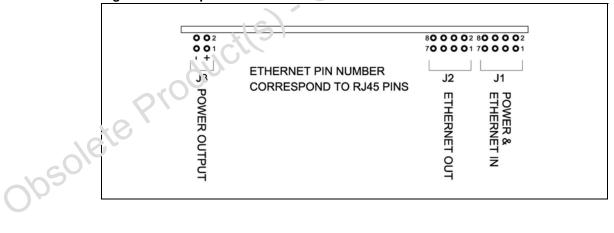

SPDCPOE12 Revision history

4 Revision history

Table 3. Document revision history

Date	Revision	Changes
20-Mar-2009	1	Initial release

Obsolete Product(s). Obsolete Product(s)

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidia. 'e. (ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and sen ices ರ್ಲೇಖರ herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and society described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services 'le cribed herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property ich is s granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a Leer se grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a ...a ranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained in a sin.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN VIRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OF WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PROD IC 'S OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PF OP ENTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of S.T. or Jcts with provisions different from the statements and/or technical features set forth in this document shall immediately void any war ani rigranted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liabi.⊕, ∖t 5Γ.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2009 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan -Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

6/6 Rev 1

